


The BT2000 scoreboard range is aimed at time keeping and scoring of sport events in stadiums.

Thanks to a large choice of models, we have a solution for your needs and budget : 2 digit sizes of 25 and 45cm, timer, scores, team names (25cm height) and advertising panels for sponsors.

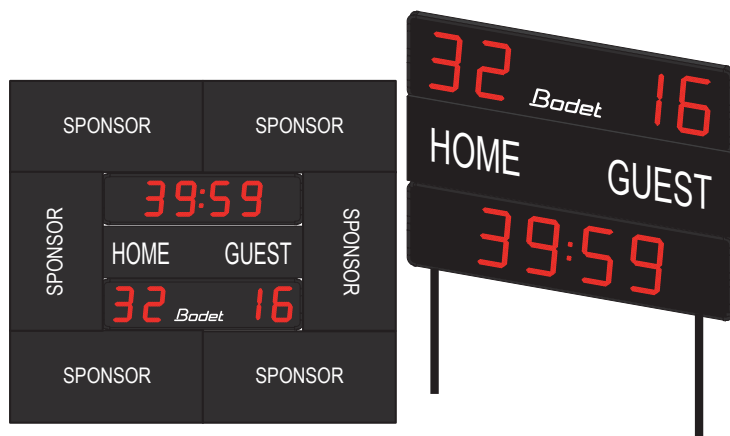

TECHNICAL FEATURES

- High brightness SMD LED display.
- Viewing angle of 160°.
- Perfect visibility under all lighting conditions.
- Luminosity adjustment from the keyboard.
- Official time display with radio synchronisation (FI or DCF) in option.
- Temperature display in option.
- Optional advertising panels on all models.

Display	Digit size	Timer	Score	Team names	Time	Readability
BT2025 SCORE	25 cm	No	0 to 9	Home / Guest	No	120 m
BT2025 CLUB	25 cm	Minutes	0 to 99	Home / Guest	No	120 m
BT2025 CLASSIC	25 cm	Minutes and seconds	0 to 99	Home / Guest	Yes	120 m
BT2045 SCORE	45 cm	No	0 to 9	Home / Guest	No	200 m
BT2045 CLUB	45 cm	Minutes	0 to 99	Home / Guest	No	200 m
BT2045 CLASSIC	45 cm	Minutes and seconds	0 to 99	Home / Guest	Yes	200 m
BT2045 ALPHA	45 cm	Minutes and seconds	0 to 99	Selectable (8 characters)	Yes	200 m

SPORTS

- The scoreboards and keyboards can be used for a large choice of sports : football, rugby, beach soccer, grass hockey, beach volley, basque pelota...

STANDARD KEYBOARD ALPHA SCORE

- For use under shelter or in the press room.
- Display to program the team names.
- Possible duplex installation.
- Wireless communication.
- Horn for rugby (option).
- Time display of the time beside the game.
- Power supply : 230V with battery power reserve.



PORTABLE KEYBOARD POCKET




- For outdoor use.
- Very easy to use.
- Wireless communication.
- Power supply : 9V battery.
- Horn for rugby (option).
- Time display beside the game.



TECHNICAL DESCRIPTION

- Mounting with 2 feet to be sealed with bars of reinforcement in case of advertising panels or in very windy areas.
- Aluminium casing with shockproof protective glass.
- Waterproof casing for outdoor use.
- Scoreboard power supply 110/240V 50/60 Hz.
- Operating temperature from -10° to 50°C.

BT2025 RANGE (25 CM DIGITS)

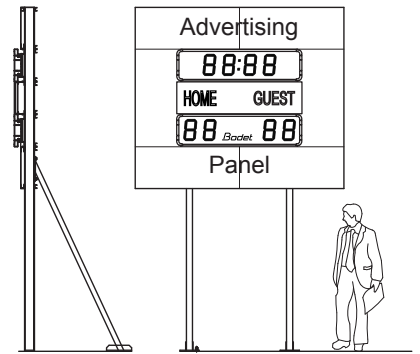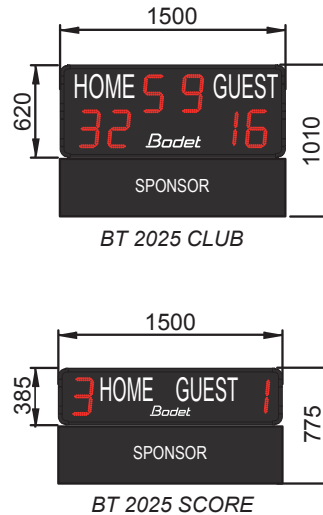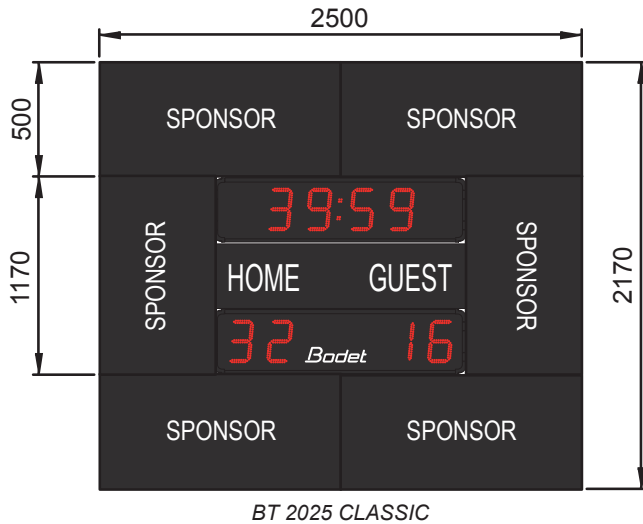

BT2045 RANGE (45 CM DIGITS)

